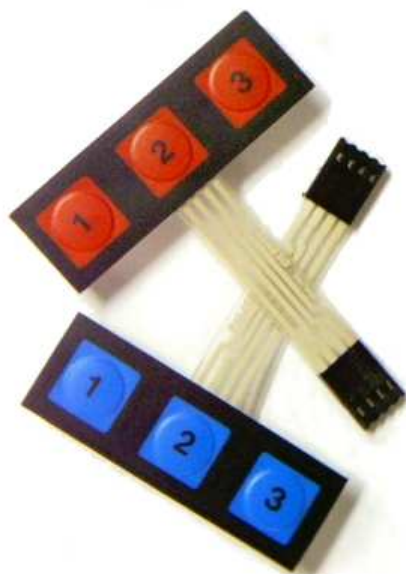


3 KEY, 60x20 mm, common line


Type	1T3ST1	flat overlay, non tactile
Type	1TF3ST1	embossed keys, soft touch
Type	1TC3ST1	flat overlay, metal snap domes
Type	1TCF3ST1	embossed keys and metal domes

The antiscratching polyester graphic layer has 2 colours: ground and text are black, keys' ground is yellow.

Different colours or customized graphic by request.

All keyboard layers are laser cut.

Keys 1 and 3 may be cut out, without affect the others.


Mounting closely 2 keyboards or more (horizontally or vertically as well), the customer can built a device with whenever number of keys, customizable by an entire overlay.

Circuit, spacer, and tail cover: polyester.
 Rear adhesive layer: 3M468.
 Tracks and pads: silver.

Connector: female, 4 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF: Ø 11mm round, 0,5mm thick.

Your key panel must be stuck on a smooth, clean and dry surface.

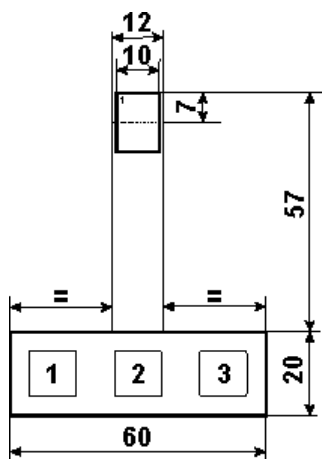


 [printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#)



this keyboard (framed)
 can be assembled with
Teko 10007.5 - 10007.9
 and **Okw** A9050107 enclosure too



RohS Conformity: this product is compliant to
 european directive 2002/95/CEE - 27/01/2003

Keyboards materials and finishing, electrical and mechanical specification

custom  [Fill the form to customize this keyboard](#)

new  [Fill the form to request new keyboard on customers' specifications](#)

