

4 KEY, 39x40 mm, common line

Type	1T4ST1	flat overlay, non tactile
Type	1TF4ST1	embossed keys, soft touch
Type	1TC4ST1	flat overlay, metal snap domes
Type	1TCF4ST1	embossed keys and metal domes

Two colours' graphic layer: black the ground and text, orange the keys' ground.

Rear silk-screened on antiscratching polyester.

Other colours or customized graphic by request.

All keyboard layers are laser cut.

Circuit, spacer, and tail cover: polyester.

Rear adhesive layer: 3M468.

Tracks and pads: silk screened silver.

Connector: female, 5 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF: Ø 7mm round, 0.5mm thick.

Length of the tail (145mm standard) can be shortened to a customized size.

Stick your keyboard on a smooth and clean surface.

Don't trap air bubbles when mounting.


 [printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#)



this keyboard (if framed)
can be assembled with
Teko 10007.5 enclosure too

RohS Conformity: this product is compliant to
european directive 2002/95/CEE - 27/01/2003

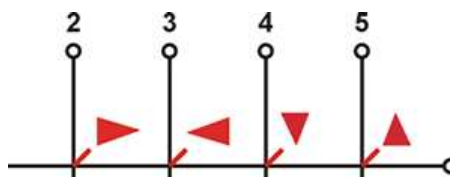

Keyboards materials and finishing, electrical and mechanical specification

custom  Fill the form to customize this keyboard

new  Fill the form to request new keyboard on customers' specifications

