

**5 KEY, 66x12 mm, common line**

Type	<b>1T5ST1</b>	flat overlay, non tactile
Type	<b>1TF5ST2</b>	embossed keys, soft touch



The antiscratching polyester graphic layer has 2 colours: ground and text are black, keys' ground is yellow.

Different colours or customized graphic by request.

All keyboard layers are laser cut.

Circuit, spacer, and tail cover: polyester.  
Rear adhesive layer: 3M468.  
Tracks and pads: silver.

Tail: 6 ways on 1.00 mm pitch, supplied without crimped connector: a special ZIF (Zero Insertion Force) connector is directly soldered on customer's motherboard. (a suggested connector is the **Molex** 52610-0671 connector). In the final assembly the keyboard tail is simply inserted into it.

The thickness of the tail terminal is increased to 0.30 mm to assure a good contact pressure on your ZIF connector.

Embossing on type 1TF: Ø 0,8mm round, 0,5mm thick.



Your key panel must be stuck on a smooth, clean and dry surface.

[printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#)



this keyboard (framed) can be assembled with **Teko** S12.9 enclosure too

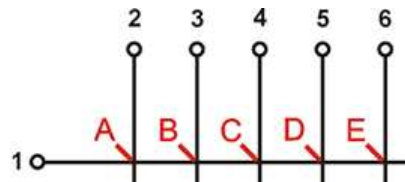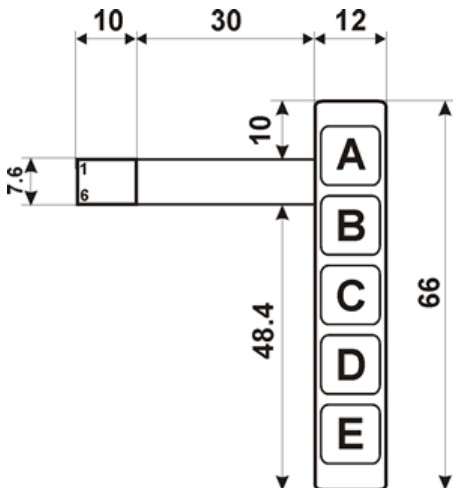

**RohS Conformity:** this product is compliant to european directive 2002/95/CEE - 27/01/2003

**Keyboards materials and finishing, electrical and mechanical specification**

**custom**  Fill the form to customize this keyboard

**new**  Fill the form to request new keyboard on customers' specifications

