
8 KEY, 89x49 mm, common line

Type	1T8ST1	flat overlay, non tactile
Type	1TF8ST1	embossed keys, soft touch
Type	1TC8ST1	flat overlay, metal snap domes
Type	1TCF8ST1	embossed keys and metal domes

Two colours' graphic layer: black the ground and text, orange the keys' ground.

Rear silk-screened on antiscratching polyester.

Other colours or customized graphic by request.

All keyboard layers are laser cut.

The pin number 1 (first left) of tail is not in use.

On RFI shielded keyboard (optional version), the pin 1 become the connection for the ground track.

Circuit, spacer, and tail cover: polyester.

Rear adhesive layer: 3M468.

Tracks and pads: silk screened silver.

Connector: female, 10 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF: Ø 11mm round, 0.5mm thick.

Stick your keyboard on a smooth and clean surface.


Don't trap air bubbles when mounting.

 [printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#) 



this keyboard (if framed)
can be assembled with
Teko 10008.5 enclosure too

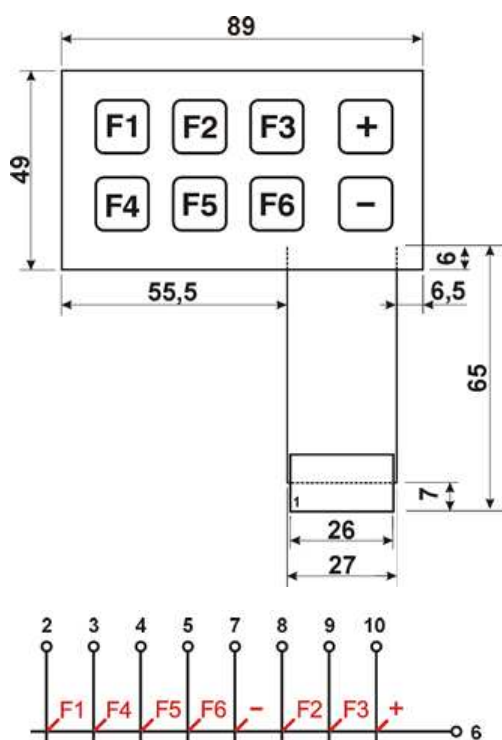

Pin number 1 not connected,
used for ground track on shielded version keyboard

RohS Conformity: this product is compliant to
european directive 2002/95/CEE - 27/01/2003

Keyboards materials and finishing, electrical and mechanical specification

custom  [Fill the form to customize this keyboard](#)

new  [Fill the form to request new keyboard on customers' specifications](#)

