

## 8 KEY, 230x30 mm, common line, shielded

Type	1T8ST2	flat overlay, non tactile
Type	1TF8ST2	embossed keys, soft touch
Type	1TC8ST2	flat overlay, metal snap domes
Type	1TCF8ST2	embossed keys and metal domes

Two colours' graphic layer: black the ground and text, orange the keys' ground.

Rear silk-screened on antiscratching polyester.

Other colours or customized graphic by request.

All keyboard layers are laser cut.

A graphite coating is silk screened back to the graphic layer to eliminate the radio frequency interferences (RFI).  
A tin plated spring links the graphic layer with the track number 10. This track will be connected to the ground.

Circuit, spacer, and tail cover: polyester.



Rear adhesive layer: 3M468.  
Tracks and pads: silk screened silver.

Connector: female, 10 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF: Ø 11mm round, 0.5mm thick.

Stick your keyboard on a smooth and clean surface.

Don't trap air bubbles when mounting.

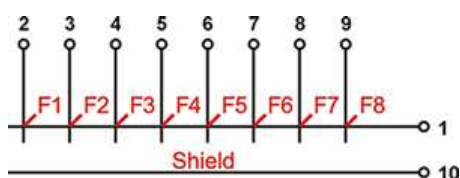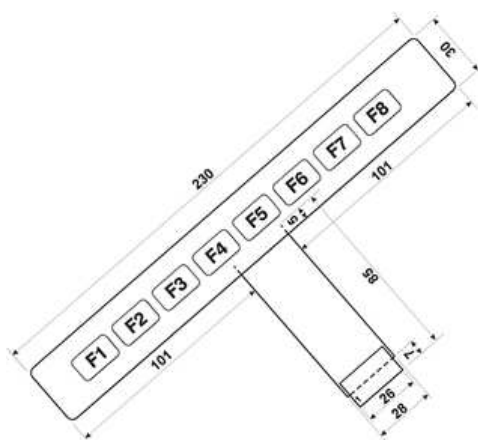

 [printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#)



this keyboard (if framed)  
can be assembled with  
**OKW** A0214070 enclosure too

**RohS Conformity:** this product is compliant to  
european directive 2002/95/CEE - 27/01/2003

## Keyboards materials and finishing, electrical and mechanical specification

**custom**  Fill the form to customize this keyboard

**new**  Fill the form to request new keyboard on customers' specifications

