



12 KEY, 48x65 mm, matrix

Type 1T12ST2	flat overlay, non tactile
Type 1TF12ST2	embossed keys, soft touch
Type 1TC12ST2	flat overlay, metal snap domes
Type 1TCF12ST2	embossed keys and metal domes

Two colours' graphic layer: black the ground and text, yellow the keys' ground.

Other colours or customized graphic by request.

Rear silk-screened on antiscratching polyester.

All keyboard layers are laser cut.

Circuit, spacer, and tail cover: polyester.


Rear adhesive layer: 3M468.

Tracks and pads: silver.

Connector: female, 7 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF:
Ø 11mm round, 0,5mm thick.

Don't trap grains or air bubbles
between keyboard and background.

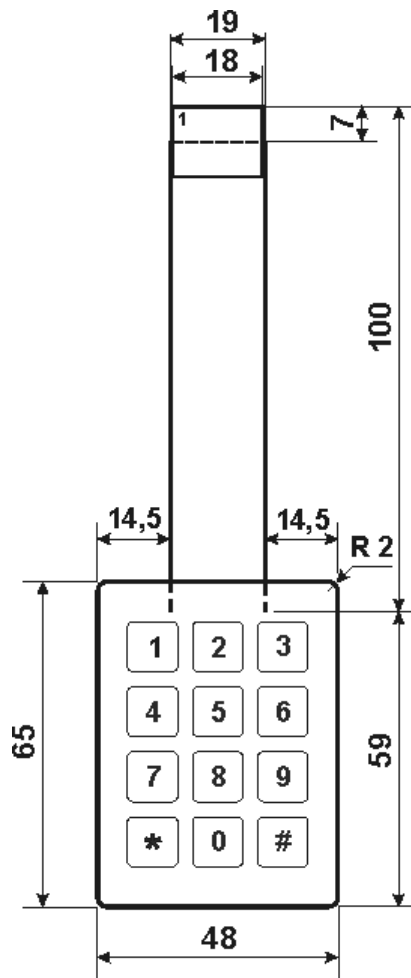


 [printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#)



this keyboard (framed)
can be assembled with
Okw A9052107 enclosure
too



RohS Conformity: this product is compliant to
european directive 2002/95/CEE - 27/01/2003

Keyboards materials and finishing, electrical and mechanical specification



Fill the form to customize this keyboard



Fill the form to request new keyboard on customers' specifications

