

15 KEY, 84x111 mm, matrix, display window

Type 1T15DS1	flat overlay, non tactile
Type 1TF15DS1	embossed keys, soft touch
Type 1TC15DS1	flat overlay, metal snap domes
Type 1TCF15DS1	embossed keys and metal domes



Five colours' polyester graphic layer:
 text and keys' frame are black,
 background is blue,
 key's backgrounds are yellow.

Tail begins below the transparent LCD window.

Other colours or customized graphic by request.

All keyboard layers are laser cut.

Circuit, spacer, and tail cover: polyester.
 Rear adhesive layer: 3M468.

Tracks and pads: silver.

Connector: female, 8 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF:
 Ø 11mm round, 0.5mm thick.

Don't trap air bubbles when mounting.



Stick your keyboard on a smooth and clean surface.

 [printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#) 



this keyboard (if trimmed)
 can be assembled with
Okw A0612007 and A0612107
 enclosure too

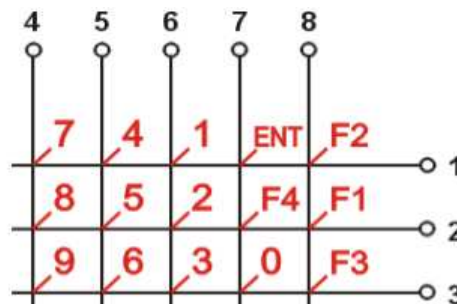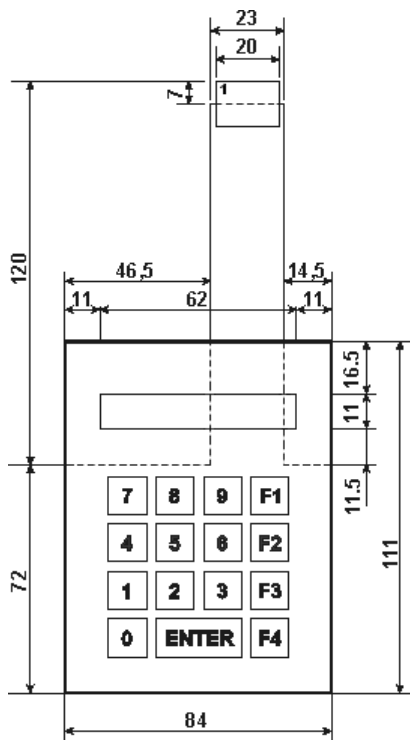

RohS Conformity: this product is compliant to
 european directive 2002/95/CEE - 27/01/2003

Keyboards materials and finishing, electrical and mechanical specification

custom  Fill the form to customize this keyboard

new  Fill the form to request new keyboard on customers' specifications

