



16 KEY, 80x120 mm, matrix, display window

Type <b>1T16DS1</b>	flat overlay, non tactile
Type <b>1TF16DS1</b>	embossed keys, soft touch
Type <b>1TC16DS1</b>	flat overlay, metal snap domes
Type <b>1TCF16DS1</b>	embossed keys and metal domes

Two colours' graphic layer:  
 black the ground and text,  
 yellow the keys'ground.

Other colours or customized graphic by request.

Rear silk-screened on antiscratching polyester.

All keyboard layers are laser cut.

Circuit, spacer, and tail cover: polyester.

Rear adhesive layer: 3M468.


Tracks and pads: silver.

Connector: female, 8 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF:  
 Ø 11mm round, 0,5mm thick.

Don't trap air bubbles when mounting.

Stick your keyboard on a smooth and clean surface.

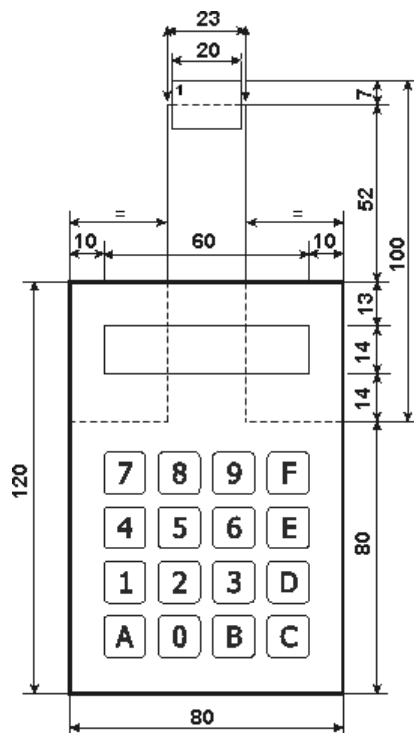


[printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#)



this keyboard (if framed)  
 can be assembled with  
**Okw** A9074209  
 enclosures too

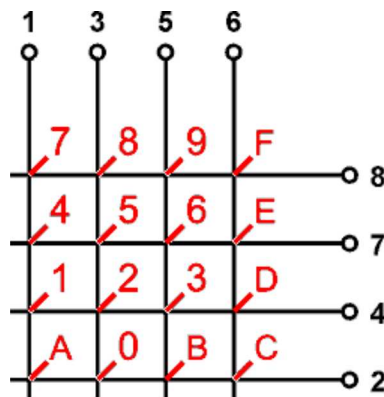

**RohS Conformity:** this product is compliant to  
 european directive 2002/95/CEE - 27/01/2003

Keyboards materials and finishing, electrical and mechanical specification

**custom** Fill the form to customize this keyboard



Fill the form to request new keyboard on customers' specifications

