



16 KEY, 80x80 mm, matrix

Type	1T16ST1	flat overlay, non tactile
Type	1TF16ST1	embossed keys, soft touch
Type	1TC16ST1	flat overlay, metal snap domes
Type	1TCF16ST1	embossed keys and metal domes

Two colours' graphic layer: black the ground and text, yellow the keys'ground.

Rear silk-screened on antiscratching polyester.

Other colours or customized graphic by request.

All keyboard layers are laser cut.

Circuit, spacer, and tail cover: polyester.

Rear adhesive layer: 3M468.

Tracks and pads: silver.

Connector: female, 8 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF: Ø 11mm round, 0.5mm thick.

Stick your keyboard on a smooth and clean surface.



Don't trap air bubbles when mounting.

 [printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#) 



this keyboard (framed)
can be assembled with
Okw A0612007 enclosure too

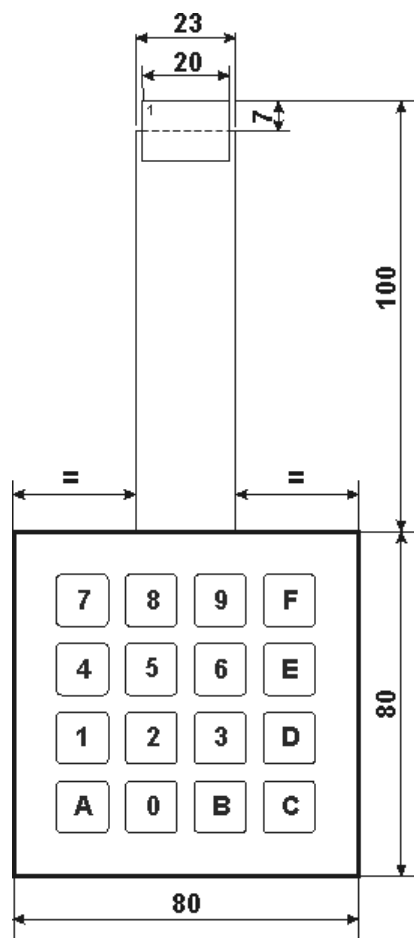

RohS Conformity: this product is compliant to
european directive 2002/95/CEE - 27/01/2003

Keyboards materials and finishing, electrical and mechanical specification

custom  Fill the form to customize this keyboard



Fill the form to request new keyboard on customers' specifications

