

16 KEY, 59x89 mm, matrix

| | | |
|------|------------------|--------------------------------|
| Type | 1T16ST2 | flat overlay, non tactile |
| Type | 1TF16ST2 | embossed keys, soft touch |
| Type | 1TC16ST2 | flat overlay, metal snap domes |
| Type | 1TCF16ST2 | embossed keys and metal domes |

Two colours' graphic layer: black the ground and text, yellow the keys'ground.

Rear silk-screened on antiscratching polyester.

Other colours or customized graphic by request.

All keyboard layers are laser cut.

Circuit, spacer, and tail cover: polyester.

Rear adhesive layer: 3M468.

Tracks and pads: silver.

Connector: female, 8 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF: Ø 11mm round, 0.5mm thick.

Stick your keyboard on a smooth and clean surface.



Don't trap air bubbles when mounting.

 [printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#) 



this keyboard (if framed)
can be assembled with
Okw A9406351 enclosure too

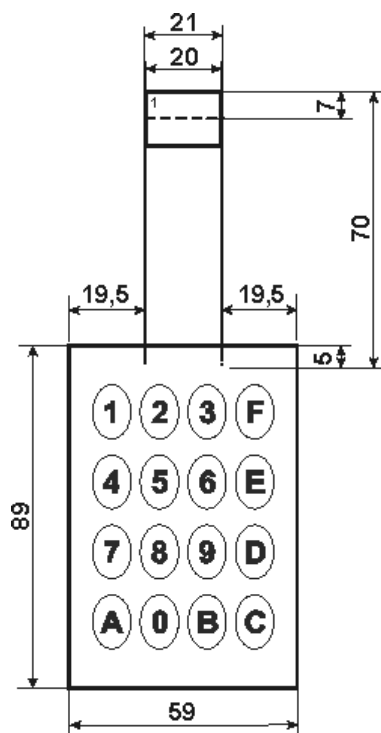

RohS Conformity: this product is compliant to
european directive 2002/95/CEE - 27/01/2003

Keyboards materials and finishing, electrical and mechanical specification

custom  Fill the form to customize this keyboard

new  Fill the form to request new keyboard on customers' specifications

