



16 KEY, 52x60 mm, matrix

Type	<b>1T16ST3</b>	flat overlay, non tactile
Type	<b>1TF16ST3</b>	embossed keys, soft touch
Type	<b>1TC16ST3</b>	flat overlay, metal snap domes
Type	<b>1TCF16ST3</b>	embossed keys and metal domes

Two colours' graphic layer: black the text,  
gray the keys'ground.

Rear silk-screened on antiscratching polyester.

Other colours or customized graphic by request.

All keyboard layers are laser cut.

Circuit, spacer, and tail cover: polyester.

Rear adhesive layer: 3M468.

Tracks and pads: silver.

Connector: female, 8 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF: Ø 11mm round, 0.5mm thick.

Stick your keyboard on a smooth and clean surface.

Don't trap air bubbles when mounting.





[printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#)



this keyboard (if framed)  
can be assembled with  
**Okw** A9072107 enclosure too

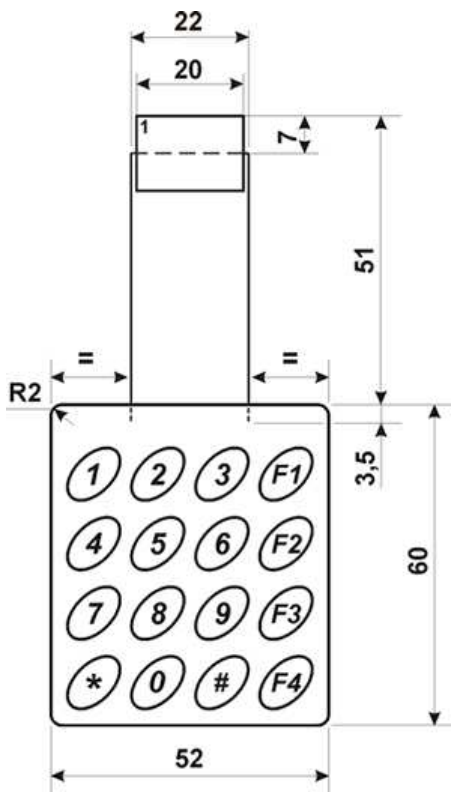

**RohS Conformity:** this product is compliant to  
european directive 2002/95/CEE - 27/01/2003

#### Keyboards materials and finishing, electrical and mechanical specification

**custom** ☐ Fill the form to customize this keyboard

**new** ☐ Fill the form to request new keyboard on customers' specifications

