



## 20 KEY, 75x70 mm, matrix

Type <b>1T20ST1</b>	flat overlay, non tactile
Type <b>1TF20ST1</b>	embossed keys, soft touch
Type <b>1TC20ST1</b>	flat overlay, metal snap domes
Type <b>1TCF20ST1</b>	embossed keys and metal domes

Three colours' graphic layer: yellow the keys' ground, orange the function keys' ground, gray the text on the background.

Rear silk-screened on antiscratching polyester.

Other colours or customized graphic by request.

All keyboard layers are laser cut.

Tail begins inside the panel edge.

Circuit, spacer, and tail cover: polyester.

Rear adhesive layer: 3M468.


Tracks and pads: silver.

Connector: female, 9 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF: the shape of buttons, 0.5mm thick.

Stick your keyboard on a smooth and clean surface.

Don't trap air bubbles when mounting.

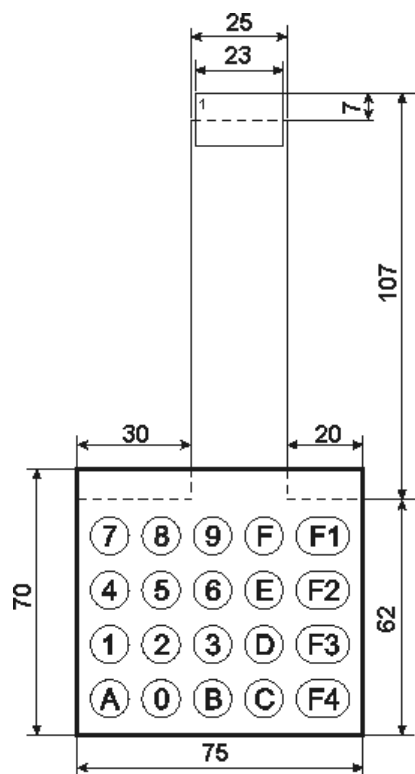


 [printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#)



this keyboard (if framed)  
can be assembled with  
**Okw** A9061117 enclosure too



**RohS Conformity:** this product is compliant to  
european directive 2002/95/CEE - 27/01/2003

## Keyboards materials and finishing, electrical and mechanical specification

**custom**  Fill the form to customize this keyboard



Fill the form to request new keyboard on customers' specifications

