

**24 KEY, 63x99 mm, matrix**

|                       |                                |
|-----------------------|--------------------------------|
| Type <b>1T24ST1</b>   | flat overlay, non tactile      |
| Type <b>1TF24ST1</b>  | embossed keys, soft touch      |
| Type <b>1TC24ST1</b>  | flat overlay, metal snap domes |
| Type <b>1TCF24ST1</b> | embossed keys and metal domes  |

Tail: after the 81 mm standard length,  
a 51 mm version is available.

Two colours' graphic layer: black the ground and text,  
yellow the keys' ground.

Other colours or customized graphic by request.

Rear silk-screened on antiscratching polyester.

All keyboard layers are laser cut.

Circuit, spacer, and tail cover: polyester.


Rear adhesive layer: 3M468.

Tracks and pads: silver.

Connector: female, 10 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF:  
Ø 11mm round, 0,5mm thick.

Don't trap grains or air bubbles  
between keyboard and background.

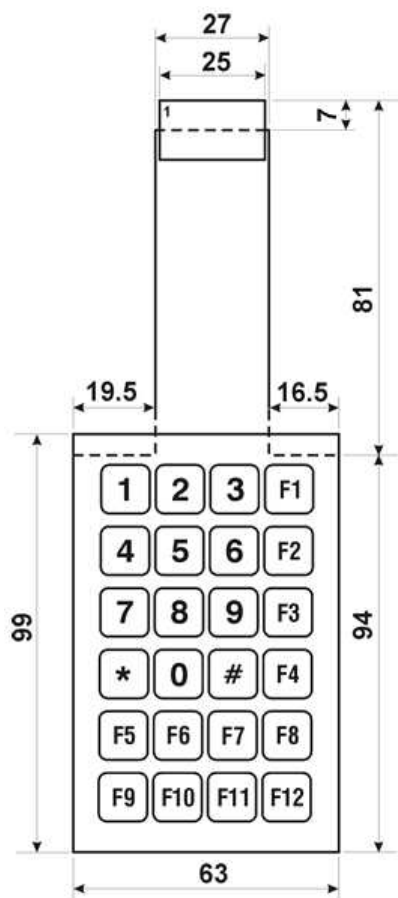


 [printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#) 



this keyboard (framed)  
can be assembled with  
**Teko** TK-F.7 and TK-S.7  
enclosures too

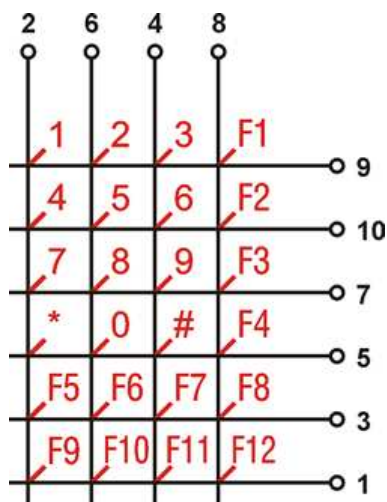

**RohS Conformity:** this product is compliant to  
european directive 2002/95/CEE - 27/01/2003

custom



Fill the form to customize this keyboard

new



Fill the form to request new keyboard on customers' specifications

