


42 KEY, 88x108 mm, matrix plus single key

Type	1T42ST1	flat overlay, non tactile
Type	1TF42ST1	embossed keys, soft touch
Type	1TC42ST1	flat overlay, metal snap domes
Type	1TCF42ST1	embossed keys and metal domes

Two colours' graphic layer: letters and background are black, yellow the keys' ground, white the background.

Rear silk-screened on antiscratching polyester.

All keyboard layers are laser cut.

Other colours or customized graphic by request.

Circuit, spacer, and tail cover: polyester.

Rear adhesive layer: 3M468.

Tracks and pads: silver.

Connector: female, 15 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF:
the shape of buttons, 0.5mm thick.

Stick your keyboard on a smooth and clean surface.



Don't trap air bubbles when mounting.

 [printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#) 



this keyboard (if framed)
can be assembled with the
Teko 2H.3 enclosure too

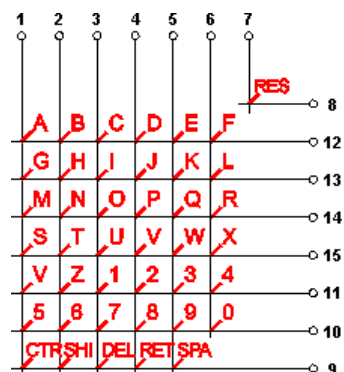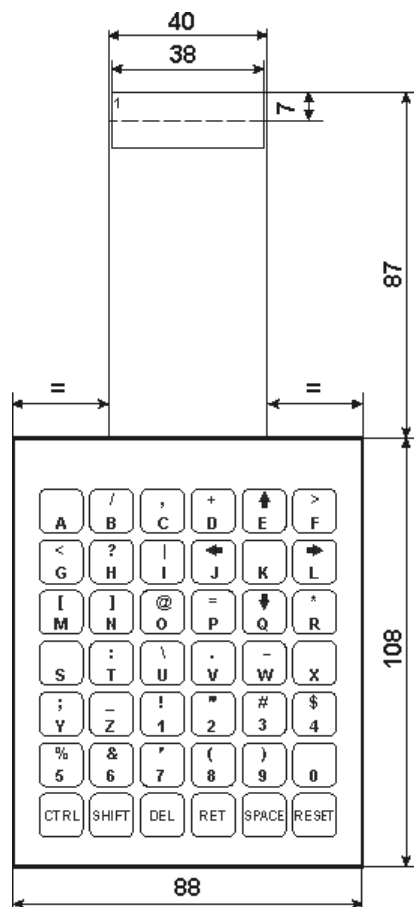

RohS Conformity: this product is compliant to
european directive 2002/95/CEE - 27/01/2003

Keyboards materials and finishing, electrical and mechanical specification

custom

Fill the form to customize this keyboard

new

Fill the form to request new keyboard on customers' specifications

