

**8 KEY, 70x36 mm, rigid, common line**

Type **4T8ST1** flat overlay, non tactile

Type **4TF8ST1** embossed keys, soft touch

The antiscratching polyester graphic layer has 2 colours:  
ground is black,  
keys' outline and numbers are green.

Two holes for LED on left side.

Different colours or customized graphic on demand.

Except for circuit, all keyboard layers are laser cut.

FR2 circuit (backelite 1,5mm) has tin plated tracks.

Silver contact pads.

Polyester spacer.

Connector: male, 9 ways on 2.54mm pitch, rear side.

Embossing on type 4TF: Ø 9mm round, 0,5mm thick.


Fit the keyboard by screws or by epoxy resins.

[printable page \(PDF\)](#)

[customize your keyboard! \(CDR\)](#)



this keyboard (if framed)  
can be assembled with  
**Teko** 101.5 e 101.9 enclosure too

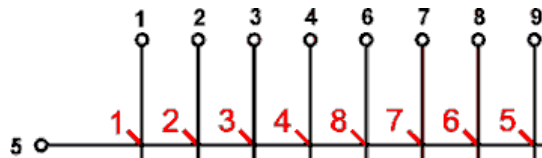

**RohS Conformity:** this product is compliant to  
european directive 2002/95/CEE - 27/01/2003

**Keyboards materials and finishing, electrical and mechanical specification**

**custom** [Fill the form to customize this keyboard](#)

**new** [Fill the form to request new keyboard on customers' specifications](#)

