

**PBC TERMINALS, 4 POSITION  
SLIDE SWITCHES**

Type **6RCS14A**: vertical knob.

Type **6RCS14C**: horizontal knob.

Signal and low power switches.



Have rotating roller for both contact and detent system.

Features: 1 pole 4 positions  
(connecting a contact line)  
or multi-pole functions.

Shorting contacts only (make before break).

Special mounting: see [form](#)

 [printable page \(PDF\)](#)

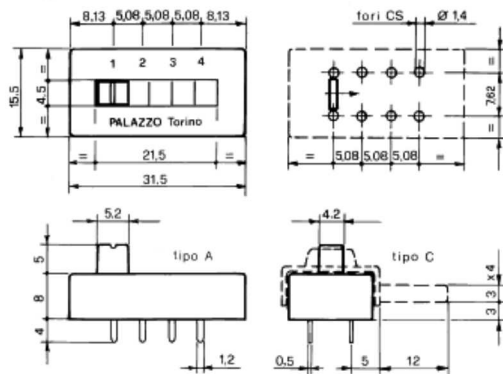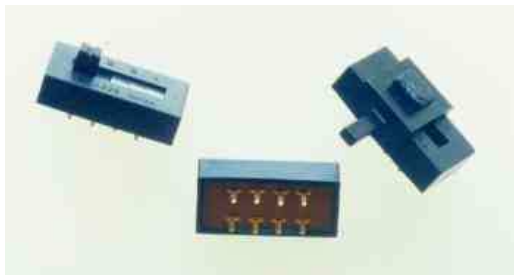

|                                   |   |
|-----------------------------------|---|
| Current breaking capacity:        | 3A 110Vac / 6A 30Vdc<br>(resistive load)                        |
| Contact resistance:               | <9mohm<br>(average initial value)                               |
| Insulation between near contacts: | 800Vac 5x10 <sup>9</sup> ohm                                    |
| Life expectancy:                  | >300.000 switching operations<br>(test current = 0,1 max value) |

**RohS Conformity:** this product is compliant to  
european directive 2002/95/CEE - 27/01/2003

[Customize a standard switch, fill the form, e-mail](#)

[Switches materials and finishings](#)

[New switches on costumer specifications \(big productions\)](#)

